

FLOODED BATTERY

85D26R (12V75Ah)



CHARACTERISTICS



Item	Specifications
Nominal Voltage	12V
Nominal Capacity (20HR)	75Ah
Reserve Capacity	128min
Cold Cranking Amps@0°F (-18°C)	630A
Dimension	Length
	259mm(10.2inches)
	Width
Height	174.8mm(6.88inches)
	221mm(8.70inches)
Approx Weight	18.4kg(40.6lbs)
Terminal	1
Cell layout	1
Hold-Down	B1
Case	Black-PP Material
Cover	Black-PP Material
Handle	TS1

APPLICATIONS

- Car start
- EV/HEV
- Engine start

GENERAL FEATURES

- High capacity and high CCA
- Long life
- Advanced lead-calcium alloy technology, maintenance-free design
- Patented venting system bring less water loss and prevent acid leakage
- OE quality certification

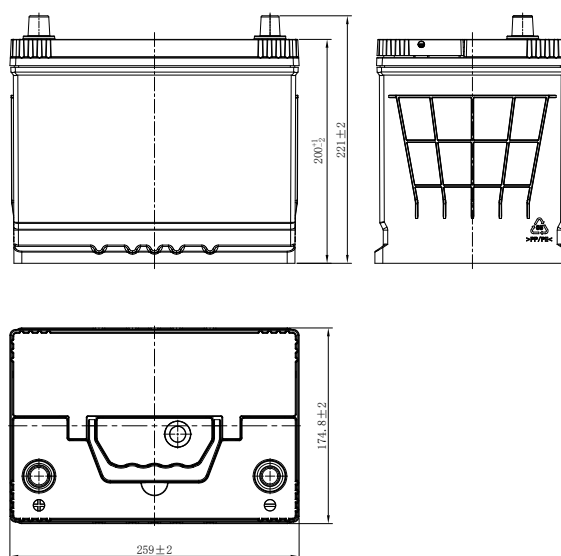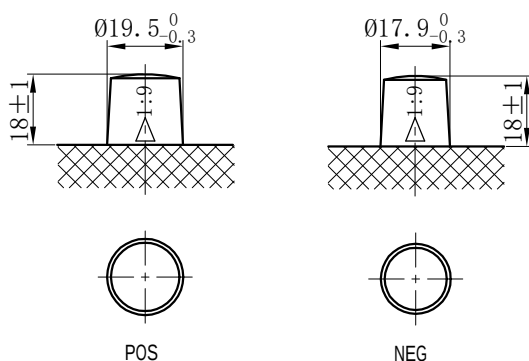

*Values are subject to variation of +/- 5% in normal manufacturing processes.

Leoch International Technology Ltd.

www.leoch.com

Leoch Batteries Pte Ltd

www.leoch.sg

Leoch Battery Corporation

www.leochamericas.com

Leoch Europe S.A.

www.leoch.eu

Data above is recommended and the picture is only for battery effect display, Leoch reserve the final right of explanation.
© LEOCH. All rights reserved. Trademarks and logos are the property of LEOCH and its affiliates unless otherwise noted. Subject to revisions without prior notice. E&OE.

Publication No.: LB-85D26R-PD-EN-V1.0-20250220